



Scan results for **limitlessboudoir.com**

# ✗ Non-compliant

**limitlessboudoir.com** isn't ADA compliant. Improve accessibility, become inclusive and meet the Web Content Accessibility Guidelines (WCAG).




Your website is not inclusive and accessible to people with disabilities. **Let's change that!**


**270**

We found **270** issues on your page


## Issue severity

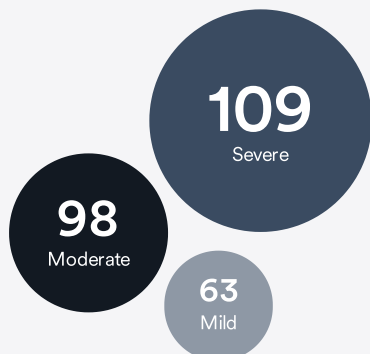

## Issues detected by category

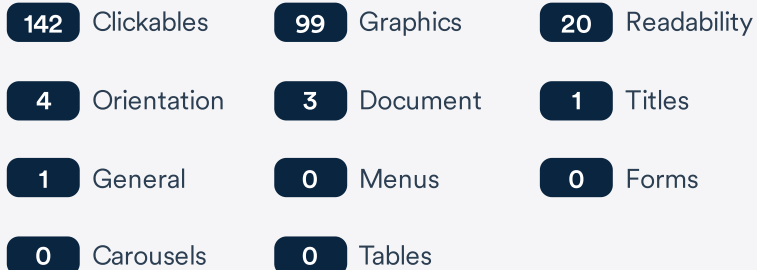

## Detected issues by type

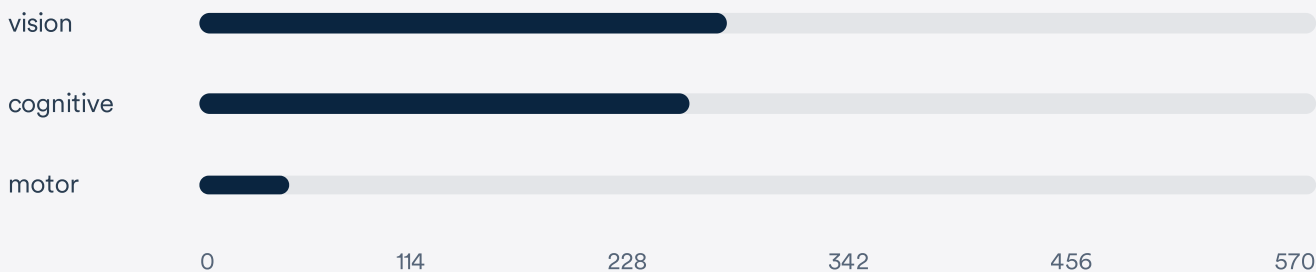

#	Element	Relevant	Successes	Failures	Score
1	Elements that behave as buttons but are built using other tags such as span, div, a or others, should include a "role" attribute that equals to "button".	No	0	40	

### Failed Elements

```
<a href="#" target="_self" class="sie-banner_1 se se-pc se-sl" data-sid="banner_1" data-scrollto="#" style="transform: scale(1, 1) translate(360px, 0px); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 51...
```

```
<a href="#" target="_self" class="sie-navigation_1 se" data-sid="navigation_1" style="transform: scale(1, 1) translate(-360px, 0px);" ><nav class="se-t sie-navigation_1-text st-m-title st-d-title">limitless<br></nav></a>
```

```
<div data-sid="navigation_2" class="sie-navigation_2 se se-pc" style="transform: scale(1, 1) translate(360px, 0px) rotate(45deg); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512"><polygon points="4...
```

```
<a href="#" target="_self" class="sie-navigation_9 se" data-sid="navigation_9" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_9-text st-m-paragraph st-d-subheading">HOME</nav></a>
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_0 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_0" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_1 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_1" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_2 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_2" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_4 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_4" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_5 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_5" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_6 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_6" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

2	Buttons should include text explaining their functionality, and if icons are used as buttons, a screen reader only text	Yes	15	25	38%
---	---	-----	----	----	-----

## Successful Elements

```
<a href="#" target="_self" class="sie-navigation_1 se" data-sid="navigation_1" style="transform: scale(1, 1) translate(-360px, 0px);" ><nav class="se-t sie-navigation_1-text st-m-title st-d-title">limitless<br></nav></a>
```

```
<a href="#" target="_self" class="sie-navigation_9 se" data-sid="navigation_9" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_9-text st-m-paragraph st-d-subheading">HOME</nav></a>
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_2 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_2" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class=...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_6 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_6" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class=...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_10 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_10" data-scrollto="#tabs-1" data-state="tabs-1|2|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 clas...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_14 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_14" data-scrollto="#tabs-1" data-state="tabs-1|1|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 clas...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_18 se se-sl se-stl" data-sid="tabs-1_view-1_18" data-scrollto="#tabs-1" data-state="tabs-1|1|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs-1_view...
```

```
<a href="#" target="_self" class="sie-tabs_view-1_2 se se-sl se-stl" data-sid="tabs_view-1_2" data-scrollto="#tabs" data-state="tabs|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs_view-1_2-text st...
```

```
<a href="#" target="_self" class="sie-tabs_view-1_6 se se-sl se-stl" data-sid="tabs_view-1_6" data-scrollto="#tabs" data-state="tabs|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs_view-1_6-text st...
```

```
<a href="#" target="_self" class="sie-tabs_view-1_10 se se-sl se-stl" data-sid="tabs_view-1_10" data-scrollto="#tabs" data-state="tabs|2|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs_view-1_10-text...
```

## Failed Elements

```
<a href="#" target="_self" class="sie-banner_1 se se-pc se-sl" data-sid="banner_1" data-scrollto="#" style="transform: scale(1, 1) translate(360px, 0px); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 51...
```

```
<div data-sid="navigation_2" class="sie-navigation_2 se se-pc" style="transform: scale(1, 1) translate(360px, 0px) rotate(45deg); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512"><polygon points="4...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_0 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_0" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_1 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_1" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_4 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_4" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_5 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_5" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_8 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_8" data-scrollto="#tabs-1" data-state="tabs-1|2|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_9 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_9" data-scrollto="#tabs-1" data-state="tabs-1|2|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_12 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_12" data-scrollto="#tabs-1" data-state="tabs-1|1|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><div class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-1_13 se se-pc se-sl se-stl" data-sid="tabs-1_view-1_13" data-scrollto="#tabs-1" data-state="tabs-1|1|0|0" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg...
```

3	Links should include text that is setting expectations to what page they are leading to. If empty links are used as layout wrapping elements, a screen-reader only text or an "aria-label" attribute should be used for that description.	Yes	85	17	83%
---	---	-----	----	----	-----

### Successful Elements

```
<a href="/about-best-boudoir-photographer-sacramento" target="_self" class="sie-navigation_3 se" data-sid="navigation_3" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_3-text st-m-paragraph st-d-subheading">ABO...
```

```
<a href="/investment" target="_self" class="sie-navigation_4 se" data-sid="navigation_4" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_4-text st-m-paragraph st-d-subheading">INVESTMENT</nav></a>
```

```
<a href="/contact" target="_self" class="sie-navigation_5 se" data-sid="navigation_5" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_5-text st-m-subheading st-d-subheading">Contact<br></nav></a>
```

```
<a href="/galleries" target="_self" class="sie-navigation_6 se" data-sid="navigation_6" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_6-text st-m-paragraph st-d-subheading">GALLERIES</nav></a>
```

```
<a href="https://limitlessboudoir.com/best-sacramento-photography-boudoir-blog/" target="_blank" class="sie-avigation_7 se" data-sid="navigation_7" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_7-text st-m-pa...
```

```
<a href="/studiorental" target="_self" class="sie-navigation_10 se" data-sid="navigation_10" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_10-text st-m-subheading st-d-subheading">Studio Rental<br></nav></a>
```

```
<a href="/sacramentoboudoirportfolio#sacramentoboudoirportfolio" target="_self" class="sie-specializing-in_2 se" data-sid="specializing-in_2" style="transform: scale(1, 1) translate(0px, 0px);" ><div style="width: 100%; height: 100%; position: absolu...
```

```
<a href="/couplesboudoirportfolio" target="_self" class="sie-specializing-in_3 se" data-sid="specializing-in_3" style="transform: scale(1, 1) translate(0px, 0px);" ><div style="width: 100%; height: 100%; position: absolute; top: 0px; left: 0px; backg...
```

```
<a href="/sacramentobridalandmaternityboudoir#sacramentobridalandmaternityboudoir" target="_self" class="sie-specializing-in_4 se" data-sid="specializing-in_4" style="transform: scale(1, 1) translate(0px, 0px);" ><div style="width: 100%; height: 100%...
```

```
<a href="/couplesboudoirportfolio#couplesboudoir" target="_self" class="sie-specializing-in_7 se" data-sid="specializing-in_7" style="transform: scale(1, 1) translate(0px, 0px);" ><h1 class="se-t sie-specializing-in_7-text st-m-title st-d-title">Wome...
```

## Failed Elements

```
<a href="/sacramentoboudoirportfolio" target="_self" class="sie-specializing-in_9 se" data-sid="specializing-in_9" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/sacramentobridalandmaternityboudoir" target="_self" class="sie-specializing-in_10 se" data-sid="specializing-in_10" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/couplesboudoirportfolio" target="_self" class="sie-specializing-in_11 se" data-sid="specializing-in_11" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/outdoorboudoirportfolio" target="_self" class="sie-specializing-in_12 se" data-sid="specializing-in_12" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/contact" target="_self" class="sie-photographer-education_8 se" data-sid="photographer-education_8" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/contact" target="_blank" class="sie-process_11 se" data-sid="process_11" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/investment" target="_blank" class="sie-process_13 se" data-sid="process_13" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/landing-1" target="_self" class="sie-tabs-1_view-1_20 se" data-sid="tabs-1_view-1_20" style="transform:
```

```
<a href="/about" target="_self" class="sie-about_3 se se-bd se-bm" data-sid="about_3" style="transform: scale(1, 1) translate(0px, 0px) rotate(-90deg);" ><div class="se-simple"></div></a>
```

```
<a href="/landing-1" target="_self" class="sie-tabs_view-1_20 se" data-sid="tabs_view-1_20" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

- 4 Links that open in a new tab or a new window should either have an "aria-label" attribute or a screen-reader only element explaining to screen-readers that this opens in a new tab. No 0 60

#### Failed Elements

```
<a href="https://limitlessboudoir.com/best-sacramento-photography-boudoir-blog/" target="_blank" class="sie-navigation_7 se" data-sid="navigation_7" style="transform: scale(1, 1) translate(360px, 0px);" ><nav class="se-t sie-navigation_7-text st-m-pa...
```

```
<a href="https://www.facebook.com/groups/405023706741141" target="_blank" class="sie-photographer-education_0 se" data-sid="photographer-education_0" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-photographer-education_0-tex...
```

```
<a href="https://www.instagram.com/limitlessboudoir/" target="_blank" class="sie-photographer-education_1 se" data-sid="photographer-education_1" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-photographer-education_1-text st...
```

```
<a href="https://www.tiktok.com/@limitless_boudoir" target="_blank" class="sie-photographer-education_2 se" data-sid="photographer-education_2" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-photographer-education_2-text st-m...
```

```
<a href="https://www.etsy.com/shop/DigitalDesignByDeb" target="_blank" class="sie-photographer-education_3 se" data-sid="photographer-education_3" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-photographer-education_3-text s...
```

```
<a href="/contact" target="_blank" class="sie-process_11 se" data-sid="process_11" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="/investment" target="_blank" class="sie-process_13 se" data-sid="process_13" style="transform: scale(1, 1) translate(0px, 0px);" ><div class="se-simple"></div></a>
```

```
<a href="https://limitlessboudoir.com/best-sacramento-photography-boudoir-blog/" target="_blank" class="sie-browse-the-blog_2 se" data-sid="browse-the-blog_2" style="transform: scale(1, 1) translate(0px, 0px);" ><h2 class="se-t sie-browse-the-blog_2-...
```

```
<a href="https://limitlessboudoir.com/best-sacramento-photography-boudoir-blog/" target="_blank" class="sie-browse-the-blog_4 se" data-sid="browse-the-blog_4" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-browse-the-blog_4-t...
```

```
<a href="https://limitlessboudoir.com/2022/05/11/naked-in-nature/" target="_blank" class="sie-browse-the-blog_5 se" data-sid="browse-the-blog_5" style="transform: scale(1, 1) translate(0px, 0px);" ><div style="width: 100%; height: 100%; position: abs...
```

5	An H1 title provides information to blind-users using screen-readers of what the main topic of the page is and each page should have exactly one H1 title.	No	Fail	-
---	--	----	------	---

#### Failed Elements

```
<h1 class="se-t sie-welcome_5-text st-m-title st-d-title se-rc">Sacramento's&nbsp;luxury boudoir Photographer<br></h1>
```

```
<h1 class="se-t sie-specializing-in_7-text st-m-title st-d-title">Women's Boudoir & Couples Intimate Photogra  
phy</h1>
```

```
<h1 class="se-t sie-headline-section_0-text st-m-title st-d-title se-rc">Session Add Ons</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_3-text st-m-title st-d-title se-rc">05</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_7-text st-m-title st-d-title se-rc">04</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_11-text st-m-title st-d-title se-rc">03</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_15-text st-m-title st-d-title se-rc">02</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_19-text st-m-title st-d-title se-rc">01</h1>
```

```
<h1 class="se-t sie-tabs-1_view-1_21-text st-m-subheading st-d-subheading">learn more</h1>
```

```
<h1 class="se-t sie-headline-section-1_0-text st-m-title st-d-title se-rc">Frequently Asked Questions</h1>
```

6	HTML title elements (H1-6) should have texts. If images or links are used, they should include an alternative or screen-reader only text.	Yes	68	0	100%
---	---	-----	----	---	------

7	Elements that visually appear as titles but are coded with a non-heading HTML Tag should include a "role" attribute that equals to "heading" or have their tags fixed.	No	0	0
---	--	----	---	---

8	Title levels should not be skipped and should be built with consistent hierarchy. For example: you cannot have "h4" titles and "h2" titles without having "h3" titles.	Yes	Pass	-	100%
---	--	-----	------	---	------

9	Interactive elements such as links, buttons and form fields	No	0	2
---	---	----	---	---

a focusable element (a, button, input, etc.) or including the "tabindex" attribute that equals to "0".

### Failed Elements

```
<div data-sid="navigation_2" class="sie-navigation_2 se se-pc" style="transform: scale(1, 1) translate(360px, 0px) rotate(45deg); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512"><polygon points="4...
```

```
<div data-sid="email-pop-up_4" class="sie-email-pop-up_4 se se-pc" style="transform: scale(1, 1) translate(0px, 0px); cursor: pointer;" ><div class="se-icon"><svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512"><polygon points="405 121.8 390...
```

10	Interactive elements that can be navigated using the keyboard should be surrounded by a visual outline whenever they are focused.	No	Fail	-
----	---	----	------	---

11	Active popups should include an "aria-modal" attribute that equals to "true", and a "role" attribute that equals to "dialog", so screen-reader users know how to navigate within it.	No	0	0
----	--	----	---	---

12	Every page should include hidden links that by clicking on them (either using keyboard navigation or a screen-reader), the user will "skip" certain blocks directly to main landmarks such as main content, menu or footer.	No	Fail	-
----	---	----	------	---

### Failed Elements

```
<a href="#" target="_self" class="sie-mobile-menu_10 se" data-sid="mobile-menu_10" style="transform: scale(1, 1) translate(0px, 0px);" ><p class="se-t sie-mobile-menu_10-text st-m-title st-d-title" >L</p></a>
```

```
<a href="#" target="_self" class="sie-tabs-1_view-2_2 se se-pc se-sl se-stl" data-sid="tabs-1_view-2_2" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-2_6 se se-pc se-sl se-stl" data-sid="tabs-1_view-2_6" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-2_10 se se-pc se-sl se-stl" data-sid="tabs-1_view-2_10" data-scrollto="#tabs-1" data-state="tabs-1|2|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 cla...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-2_14 se se-sl se-stl" data-sid="tabs-1_view-2_14" data-scrollto="#tabs-1" data-state="tabs-1|2|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 clas
```



```
<a href="#" target="_self" class="sie-tabs-1_view-2_18 se se-sl se-stl" data-sid="tabs-1_view-2_18" data-scrollto="#tabs-1" data-state="tabs-1|0|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs-1_vie...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-3_2 se se-pc se-sl se-stl" data-sid="tabs-1_view-3_2" data-scrollto="#tabs-1" data-state="tabs-1|4|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-3_6 se se-pc se-sl se-stl" data-sid="tabs-1_view-3_6" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg); cursor: pointer;" ><h2 class...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-3_10 se se-sl se-stl" data-sid="tabs-1_view-3_10" data-scrollto="#tabs-1" data-state="tabs-1|3|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs-1_vie...
```

```
<a href="#" target="_self" class="sie-tabs-1_view-3_14 se se-sl se-stl" data-sid="tabs-1_view-3_14" data-scrollto="#tabs-1" data-state="tabs-1|1|0|0" style="transform: scale(1, 1) translate(0px, 0px) rotate(270deg);" ><h2 class="se-t sie-tabs-1_vie...
```

13	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should be wrapped inside an element with an "aria-hidden" attribute that equals to "false", or include it directly, and have it dynamically changed to "true" when they become visible.	No	0	0
----	---	----	---	---

14	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should include a "tabindex" attribute that is below 0, and have it dynamically changed to 0 when they become visible.	No	0	0
----	---	----	---	---

15	Menus should either be built using the HTML5 "nav" element or include a "role" attribute that equals to "menu" or "navigation" to indicate a navigation landmark for screen-readers.	No	0	0
----	--	----	---	---

16	Menu items that have a dropdown menu include an "aria-haspopup" attribute that equals to "true".	No	0	0
----	--	----	---	---

17	Menu items that have a dropdown menu include an "aria-expanded" attribute that equals to "false" that changes to "true" and back when opening or closing the dropdown.	No	0	0
----	--	----	---	---

Images should have an alternative text description that describes both the objects and the embedded text that the image contains, using the "alt" attribute.

### Successful Elements

```
<polygon points="405 121.8 390.2 107 256 2 41.2 121.8 107 107 121.8 241.2 256 107 390.2 121.8 405 256 270.8 390.2 405 405 390.2 270.8 256 405 121.8" ></polygon></svg>
```

```
<svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512" ><path d="M288 192v-38.1c0-17.2 3.8-25.9 30.5-25.9H352V64h-55.9c-68.5 0-91.1 31.4-91.1 85.3V192h-45v64h45v192h83V256h56.4l7.6-64h-64z" ></path></svg>
```

```
<svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512" ><path d="M338,54.63H174c-62.72,0-114,51.3 2-114,114V343.33c0,62.72,51.32,114,114H338c62.72,0,114-51.32,114-114V168.67C452,105.94,400.68,54.63, 338,54.63Zm83.91,288.71A84.24,84.24,0,0,1,...
```

```
<svg xmlns="http://www.w3.org/2000/svg" viewBox="0 0 512 512" ><path d="M433.29,150.28c-13.21-1.22-34.28-5.4-52.61-20.21a164.93,164.93,0,0,1-27.47-32.68l-.64-1-.62-1-.14-.21c-.69-1.12-1.35-2.23-2-3.32-2.62-4.5-4.75-8.68 -5.29-9.73-1.91-3.82-3.48-7.31-...
```

```
<svg class="se-line" style="width: 1px; height: 1079px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="0" data-d-rotatedheight="833" data-d-widthoffset="416.5" data-d-heightoffset="416.5" data-d-...
```

```
<svg class="se-line" style="width: 1920px; height: 1px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="1200" data-d-rotatedheight="0" data-d-widthoffset="0" data-d-heightoffset="0" data-d-isroun...
```

```
<svg class="se-line" style="width: 1px; height: 954px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="0" data-d-rotatedheight="954" data-d-widthoffset="477" data-d-heightoffset="477" data-d-isro...
```

```
<svg class="se-line" style="width: 2064px; height: 1px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="1344" data-d-rotatedheight="0" data-d-widthoffset="0" data-d-heightoffset="0" data-d-isroun...
```

```
<svg class="se-line" style="width: 991px; height: 1px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="631" data-d-rotatedheight="0" data-d-widthoffset="0" data-d-heightoffset="0" data-d-isround=...
```

```
<svg class="se-line" style="width: 698px; height: 1px;" ><line data-d-strokelinecap="butt" data-d-linestyle="solid" data-d-thickness="1" data-d-rotatedwidth="698" data-d-rotatedheight="0" data-d-widthoffset="0" data-d-heightoffset="0" data-d-isround=...
```

21	Figure elements that are used to display images should have a "role" attribute that equals to "none" and the image provide itself should provide the description using an "alt" attribute.	No	0	0
22	Every "area" element of a "map" tag should be regarded as a standard image and receive an alternative text description using an "alt" attribute.	No	0	0
23	Small or hidden tracker pixel images (often used for analytics or marketing purposes) should include a "role" attribute that equals to "none" or "presentation" so they are excluded from screen-readers.	No	0	0
24	Form fields should either include an "aria-label" attribute or a connected LABEL element describing the requirement of the field (email, phone, name, etc.).	No	0	0
25	Form elements cannot have the same ID, or else their corresponding label will provide false information.	No	0	0
26	Required form fields should include an "aria-required" attribute that equals to "true" so blind users using screen-readers know their validation.	No	0	0
27	The validity status of every form element must be represented in the code at all times using the "aria-invalid" attributes and the "true/false" values, and change dynamically when the status changes.	No	0	0
28	aria-describedby and aria-labeledby attributes should be connected by ID to an element that either has text description or an "aria-label" attribute.	No	0	0
29	All forms should have a submission button that is built as an input type "submit" or a "button" element, or include a "role" tag that equals to "button". Buttons can be hidden if the form can be submitted using the Enter key.	No	0	0

30	Search forms should include a "role" tag that equals to "search" (or be wrapped by one) to indicate a search landmark for screen-readers.	No	0	0
----	---	----	---	---

31	The title tag of the HEAD section (also the title that appears in the browser tab and Search Engine result pages) should exist and describe the name of the current webpage for screen-reader users.	Yes	Pass	-	100%
----	--	-----	------	---	------

#### Successful Elements

```
<title>Limitless Boudoir | Prestige NorCal Luxury Boudoir</title>
```

32	The HTML tag should include a "lang" attribute that represents the main language of the webpage so screen-readers can calibrate on it for blind users.	No	Fail	-
----	--	----	------	---

#### Failed Elements

```
<html class="d desktop landscape" lang=""><head> <meta charset="UTF-8"> <meta name="viewport" content="width=device-width, initial-scale=1"> <title>Limitless Boudoir | Prestige NorCal Luxury Boudoir</title> <link rel="preconnect" hr...
```

33	The meta viewport tag should allow vision impaired users to pinch-zoom at least double the standard scaling using the user-scalable="yes" and maximum-scale={2 or higher} content strings.	Yes	Pass	-	100%
----	--	-----	------	---	------

#### Successful Elements

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

34	Landmarks such as main content and footer should be built using their corresponding HTML5 element or include a description using an "aria-label" attribute and a "role" tag that equals to "contentinfo" or "main". Landmarks such as search and navigation are tested in other sections.	Yes	1	2	33%
----	---	-----	---	---	-----

#### Failed Elements



```
<div class="se-t sie-navigation_8-text st-m-subheading st-d-subheading se-rc">boudoir STUDIO</div>
```

```
<nav class="se-t sie-navigation_9-text st-m-paragraph st-d-subheading">HOME</nav>
```

```
<nav class="se-t sie-navigation_10-text st-m-subheading st-d-subheading">Studio Rental<br ></nav>
```

#### Failed Elements

```
<h3 class="se-t sie-specializing-in_13-text st-m-subheading st-d-subheading">Boudoir & Glamour Gallery</h3>
```

```
<h3 class="se-t sie-specializing-in_14-text st-m-subheading st-d-subheading">Bridal & Maternity Boudoir Gallery</h3>
```

```
<h3 class="se-t sie-specializing-in_15-text st-m-subheading st-d-subheading">Couples Boudoir Gallery</h3>
```

```
<h3 class="se-t sie-specializing-in_16-text st-m-subheading st-d-subheading">Outdoor Boudoir Gallery</h3>
```

```
<h3 class="se-t sie-process_12-text st-m-subheading st-d-subheading">Book it here</h3>
```

```
<h2 class="se-t sie-tabs-1_view-1_2-text st-m-subheading st-d-subheading">Add on our luxury client closet</h2>
```

```
<h2 class="se-t sie-tabs-1_view-1_6-text st-m-subheading st-d-subheading">Soak in our bathtub set</h2>
```

```
<h2 class="se-t sie-tabs-1_view-1_10-text st-m-subheading st-d-subheading">GET SPICY WITH OUR ACCESSORIES</h2>
```

```
<h2 class="se-t sie-tabs-1_view-1_14-text st-m-subheading st-d-subheading">GET WET IN OUR SHOWER SET</h2>
```

```
<h2 class="se-t sie-tabs-1_view-1_18-text st-m-subheading st-d-subheading">ADD ON LUXURY ANGEL WINGS</h2>
```

38	Carousels should include an "aria-label" attribute that equals to "carousel"/"slider" or something else that indicates the functionality, as well as be tagged as a landmark for screen-readers using a "role" tag that equals to "contentinfo".	No	0	0
----	--	----	---	---

39	Control elements such as next and previous icons should include an "aria-label" attribute or a screen-reader only text that explains the functionality to screen-readers.	No	0	0
----	---	----	---	---

40	A common accessibility mistake is to treat carousels as live	No	0	0
----	--	----	---	---



"assertive values. Using this practice will cause screen-readers to cut and skip announcements.

41	Carousel pagination items (usually used as small dots at the bottom of the carousel) should indicate their functionality and slide number they control using an "aria-label" and a screen-reader only text.	No	0	0
----	---	----	---	---

42	Tables that are being used as layout structures should include a "role" attribute that equals to "presentation" to indicate to screen-readers that it is not really a table.	No	0	0
----	--	----	---	---

43	If nested tables are used (a table element within a table cell), set the nested tables "role" attribute to "presentation".	No	0	0
----	--	----	---	---

44	Tables that are missing a THEAD row with TH elements, should include a "role" attribute that equals to "rowheader" on the TD elements of the TR that represents the visual table headings.	No	0	0
----	--	----	---	---

45	Visually deleted texts (often used to show a previous price of a sale) should include an "aria-label" attribute or a screen-reader only text that explains this is deleted text.	No	0	0
----	--	----	---	---

46	Breadcrumbs main element should include a "role" attribute that equals to "navigation" and an "aria-label" attribute that describes the functionality."	No	0	0
----	---	----	---	---

47	Ratings/scores that are represented visually using stars, meters or other indicators should either have an "aria-label" attribute or a screen-reader only texts conveying the score/rate.	No	0	0
----	---	----	---	---

48	Making use of an accessibility interface helps to ensure that vision impaired users can adjust some of the UI and the design (font-size, colors, spacing, etc.) to their needs. It is not a compliance requirement, but can help to improve compliance.	No	0	0
----	---	----	---	---

49	Iframe elements should include a "title" or an "aria-label" attribute explaining the purpose, the functionality or the destination of the iframe, or be tagged hidden for screen-readers if irrelevant.	No	Fail	-
----	---	----	------	---

#### Failed Elements

```
<iframe src="https://hello.dubsado.com/public/form/view/64d5b52c0bf1e4003a3ed918" frameborder="0" style="width: 1px; min-width: 100%; overflow: hidden; height: 535px;" id="iFrameResizer0" scrolling="no"></iframe>
```